


Butterfly 4pro



Dimensions(W×H×D): 215×122×165mm

Specifications

Frequency Response(-6dB)	100Hz-22kHz
Power	60W
Maximum Calculated SPL/1M(Continuous/Peak)	111dB/117dB
Horizontal Coverage	100°
Vertical Coverage	20°
LF	4" driver
HF	2x1" driver
Crossover Mode	Passive Crossover
Impedance	16Ω
Input Connectors	2×NL4MP
Cabinet Material	ABS plastic material
Protection grade	/
Angle adjustment	0°, 4°
Pole Mount	M10
Optional Accessories	Hanging Bracket, Wall Mount Bracket, Support Bracket
Cabinet Color	Metal gray
Mesh Color	Metal gray is standard and default color, Contact Audiocenter for customization
Dimensions(W×H×D)	215x122x165mm
Net Weight	2.3kg
Technical Support and After-sales Service	Global application support team, EASE GLL Files

Product Overview

Butterfly 4pro consists of 1 pc 4" LF driver and 2 pcs soft dome tweeters. The HF adopts a unique T-eye™ design, and the array layout is assembled in the center front of the speaker. The speaker has a wider frequency response and larger near-field coverage, and the sound is more delicate.

Butterfly 4pro adopts a modular design concept, which can be used individually or in combination with multiple speakers. It has good scalability and can flexibly adapt to various environments and occasions.

System Configuration

- Artist T2.4V/T4.4V Amplifier
- BrainCore CU

Back Panel




Accessories




Wall Mount / Monitor Bracket
(Standard accessory packed with the speaker)

Dimension (WxHxD):
117x55x141mm



Single Wall Mount



Monitor



Hanging Frame

Dimension (WxHxD):
205x30.5x164.5mm



Hanging



Wall Mounted Bracket

Dimension (WxHxD):
205x100x339mm




Multiple pcs Wall Mount




Pole Mount Bracket


Dimension (WxHxD):
205x92.5x164.5mm

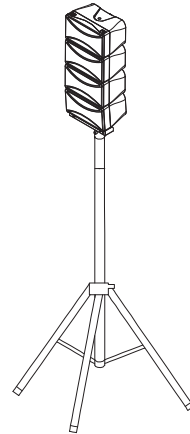

Tripod Pole Mount

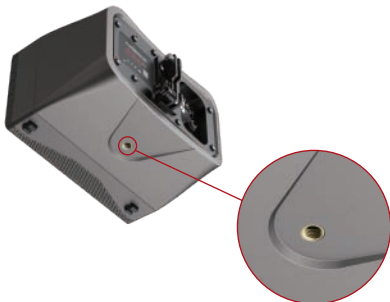

Cabinet built-in M10 bracket hole



Mount with Microphone Stand